

**kronotex**  
FLOORS FOR LIVING

LIFE CAN BE  
SO BEAUTIFUL

[KRONOTEX.COM](http://KRONOTEX.COM)

**COLLECTION 2010**

rrp 4,00 GBP

GB

A floor is the foundation for every type of room design, and hence the basis for creating one's own sense of what life should be all about. For this purpose, **Kronotex** opens up a completely new lightness of being for you. Experience laminate floors which meet all demands, which feature unique aesthetics and top-class quality. There is no limit to where your imagination can carry you!



**MAMMUT** 12 mm



**ROBUSTO** 12 mm



**AMAZONE** 10 mm



**MEGA** 8 mm

**THICKNESS** 12 mm  
**LENGTH** 1845 mm  
**WIDTH** 188 mm  
**PACKING UNIT** 4 panels  
**COVERAGE PER PACKAGE**  
 1,387 m<sup>2</sup>

**PALLET**  
 56 boxes / 77,697 m<sup>2</sup>

**THICKNESS** 12 mm  
**LENGTH** 1375 mm  
**WIDTH** 188 mm  
**PACKING UNIT** 5 panels  
**COVERAGE PER PACKAGE**  
 1,293 m<sup>2</sup>

**PALLET**  
 56 boxes / 72,38 m<sup>2</sup>

**THICKNESS** 10 mm  
**LENGTH** 1380 mm  
**WIDTH** 113 mm  
**PACKING UNIT** 8 panels  
**COVERAGE PER PACKAGE**  
 1,248 m<sup>2</sup>

**PALLET**  
 42 boxes / 52,396 m<sup>2</sup>

**THICKNESS** 8 mm  
**LENGTH** 1302 / \*644 mm  
**WIDTH** 326 / \*310 mm  
**PACKING UNIT** 5 / \*10 panels  
**COVERAGE PER PACKAGE**  
 2,122 / \*1,996 m<sup>2</sup>

**PALLET**  
 45 boxes / 95,502 m<sup>2</sup>  
 \*48 boxes / 95,827 m<sup>2</sup>

**COMMERCIAL 33**



AC 5

**EXAMPLE OF APPLICATION**  
 Department stores

**COMMERCIAL 33**



AC 5

**EXAMPLE OF APPLICATION**  
 Department stores

**COMMERCIAL 32**



AC 4

**EXAMPLE OF APPLICATION**  
 Hotels

**COMMERCIAL 32**



AC 4

**EXAMPLE OF APPLICATION**  
 Hotels

- XXL extra long
- traditional V-groove
- wood structure
- natural sound
- antistatic



- wood structure
- natural sound
- for the highest demands
- antistatic



- narrow plank
- traditional V-groove
- wood structure
- antistatic



- enhanced emboss
- naturalistic surface



# LIFE CAN BE SO FABULOUS



**EXQUISIT 8+1 mm**



**DYNAMIC 8 mm**



**SMART 7 mm**



**BASIC 6 mm**

**THICKNESS** 8+1 mm  
**LENGTH** 1380 mm  
**WIDTH** 193 mm  
**PACKING UNIT** 8 panels  
**COVERAGE PER PACKAGE**  
2,131 m<sup>2</sup>

**PALLET**  
56 boxes / 119,32 m<sup>2</sup>

**THICKNESS** 8 mm  
**LENGTH** 1380 mm  
**WIDTH** 193 mm  
**PACKING UNIT** 8 panels  
**COVERAGE PER PACKAGE**  
2,131 m<sup>2</sup>

**PALLET**  
56 boxes / 119,32 m<sup>2</sup>

**THICKNESS** 7 mm  
**LENGTH** 1380 mm  
**WIDTH** 193 mm  
**PACKING UNIT** 9 panels  
**COVERAGE PER PACKAGE**  
2,397 m<sup>2</sup>

**PALLET**  
56 boxes / 134,235 m<sup>2</sup>

**THICKNESS** 6 mm  
**LENGTH** 1376 mm  
**WIDTH** 193 mm  
**PACKING UNIT** 10 panels  
**COVERAGE PER PACKAGE**  
2,656 m<sup>2</sup>

**PALLET**  
56 boxes / 148,718 m<sup>2</sup>

**COMMERCIAL 32**



**AC 4**

**EXAMPLE OF APPLICATION**  
Hotels

**COMMERCIAL 32**



**AC 4**

**EXAMPLE OF APPLICATION**  
Hotels

**COMMERCIAL 31**



**AC 3**

**EXAMPLE OF APPLICATION**  
Offices

**LIVING 23**



**AC 3**

**EXAMPLE OF APPLICATION**  
Hallway


- traditional V-groove
- wood structure
- sound reduced



- largest choice of colours



# EXPRESS CLIC SYSTEM

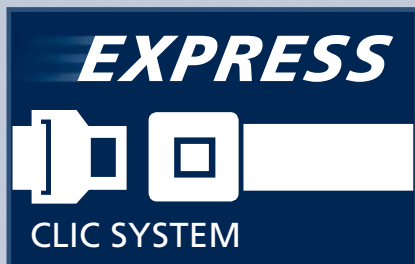




Much easier to install.

Up to **50%** quicker to install.

**No** hammer, tapping block and pulling bar required.

Safe and stable.

You can walk on the floor immediately after installation.



4



**Kronotex** floors are low-maintenance and hard-wearing.



**Kronotex** floors are flame resistant.



**Kronotex** floors are largely resistant to cigarette burns.



**Kronotex** floors are non-fading and retain their brilliance over many years.



**Kronotex** floors are rugged, load and impact-resistant.



**Kronotex** floors are abrasion-resistant.



**Kronotex** floors are produced from natural sustainable raw materials.



**Kronotex** floors are comfortable underfoot and of course also available with footfall sound insulation.




**Kronotex** floors are well suited for installation over subfloor heating.




**Kronotex** floors are stain-resistant.

# SURFACES / STRUCTURES


## SURFACES




1-STRIP



2-STRIP




3-STRIP



MULTI-STRIP



TILE



NATURAL STONE FORMAT

## STRUCTURES



**PR** (wood pore): typical wood structure



**HS** (hand-scraped): surface like that of stripped floorboards



**MO** (matt oiled): matt oiled surface appearance



**TI** (tiles): tile appearance with original joint pattern



**WG** (wood grain): rustic embossing



**ST** (stone): distinctive stone



**MX** (matrix): deep structure embossing with typical wood matt/gloss contrast



**CP** (chrome pore): wood structure with shine effect



**ER** (registered emboss): genuine wood appearance due to consistence between pattern and embossing




12 mm

6

# MAMMUT

LIFE CAN BE SO TOUGH

KRONOTEX.COM

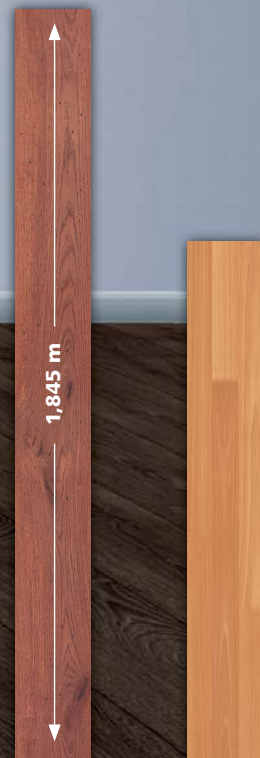

**MAMMUT**    STANDARD


**MAMMUT** panels are extra long and extra hard – our masterpiece for the most discerning users.

12 mm

8



**V4** – all panels feature a 45° sloped edge all the way round. When they are joined together, a v-groove forms, producing a **natural solid wood character**.



**12 mm panel thickness** results in particularly effective sound reduction.



The decors with **shine effect** combines velvet matt wood finish with an interesting gloss effect in its finely structured pores.



antistatic

D2802 CAPITAL OAK COFFEE / 1-STRIP / V4





**BARNWELL OAK** / 1-STRIP / ER / V4

D2235



**WENGE** / 1-STRIP / WG / V4

D2412



**LIMED OAK** / 1-STRIP / ER / V4

D2413



**TEAK CLASSIC** / 1-STRIP / MO / V4

D2443



**BARRIQUE OAK** / 1-STRIP / ER / V4

D2462



**STABLE OAK** / 1-STRIP / ER / V4

D2773



**CAPITAL OAK LIGHT** / 1-STRIP / CP / V4

D2800



**CAPITAL OAK MEDIUM** / 1-STRIP / CP / V4

D2801



**CAPITAL OAK COFFEE** / 1-STRIP / CP / V4

D2802



**OAK CHAMPAGNE** / 1-STRIP / ER / V4

D2933



**ICE OAK** / 1-STRIP / ER / V4

D2938



**BRAND ASH** / 1-STRIP / MO / V4

D2993



**CAPITAL OAK** / 1-STRIP / CP / V4

D2994



**CAPITAL OAK NATURE** / 1-STRIP / CP / V4

D2999

**PANEL SIZE**  
1845 x 188 x 12 mm

**PACKING UNIT**  
4 panels / 1,387 m<sup>2</sup>

**PALLET**  
56 boxes / 77,697 m<sup>2</sup>

**USE CLASS**  
33 / AC 5

MAMMUT





**12** mm

10

D2778 WALNUT / 1-STRIP

# ROBUSTO

LIFE CAN BE SO SOLID

KRONOTEX.COM




**12** mm

12



**V2 – decor 2975 and 2981** – these panels feature a 45° sloped edge on the long side. When they are joined together, a v-groove forms, producing a **natural solid wood character**.



**12 mm panel thickness** results in particularly effective sound reduction.



antistatic

D2778 WALNUT / 1-STRIP



**TREEHILL OAK YELLOW** / 2-STRIP / ER

D 639



**BOSSAGE OAK** / 1-STRIP / PR / V2

D 2975



**SACRAMENTO PINE** / 1-STRIP / WG

D 1496




**OAK PROVENCE** / 1-STRIP / ER / V2

D 2981



**VALHALLA BIRCH** / 1-STRIP / HS

D 2471

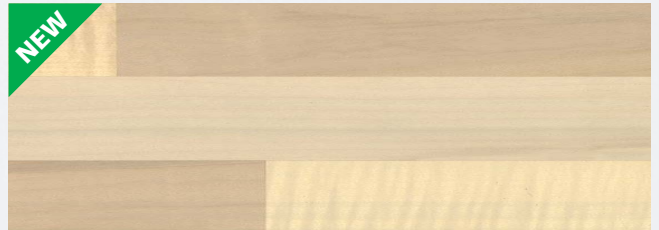

**KODIAC MAPLE** / 3-STRIP / PR

D 2985



**WALNUT** / 1-STRIP / WG

D 2778



**FAMOUS CHERRY** / 3-STRIP / MO

D 2990



**OKLAHOMA OAK WHITE** / 1-STRIP / ER

D 2944



**PERFECT BEECH** / 3-STRIP / PR

D 2991



**OKLAHOMA OAK BLACK** / 1-STRIP / PR

D 2945

# ROBUSTO

**PANEL SIZE**  
1375 x 188 x 12 mm

**PACKING UNIT**  
5 panels / 1,293 m<sup>2</sup>

**PALLET**  
56 boxes / 72,38 m<sup>2</sup>

**USE CLASS**  
33 / AC 5





**10** mm

# AMAZONE

LIFE CAN BE SO STYLISH

KRONOTEX.COM



**AMAZONE** floorboards are long and narrow, which lends them a particularly delicate floor look.

**10** mm

16



**V4** – all panels feature a 45° sloped edge all the way round. When they are joined together, a v-groove forms, producing a **natural solid wood character**.



antistatic

D2772 CANADIAN MAPLE / 1-STRIP / V4





**REDCORE BEECH** / 1-STRIP / MO / V4

D2201



**BRAZILIAN CHERRY** / 1-STRIP / MO / V4

D2444



**OAK PARISIENNE** / 1-STRIP / ER / V4

D2323



**CAMBRIDGE OAK** / 1-STRIP / ER / V4

D2461



**MAHOGANY** / 1-STRIP / MO / V4

D2390



**RED OAK** / 1-STRIP / WG / V4

D2771



**KEMPAS** / 1-STRIP / MO / V4

D2391



**CANADIAN MAPLE** / 1-STRIP / MO / V4

D2772



**OKLAHOMA OAK** / 1-STRIP / ER / V4

D2432



**CUMBRIAN MAPLE** / 1-STRIP / MO / V4

D2779



**TEAK CLASSIC** / 1-STRIP / MO / V4

D2443



**HONEY OAK** / 1-STRIP / MO / V4

D2915

Panels with 5 different shades give the floor a great variety in colour!

# AMAZONE

**PANEL SIZE**  
1380 x 113 x 10 mm

**PACKING UNIT**  
8 panels / 1,248m<sup>2</sup>

**PALLET**  
42 boxes / 52,396m<sup>2</sup>

**USE CLASS**  
32 / AC 4





8 mm

18


# MEGA

LIFE CAN BE SO MAGICAL

[KRONOTEX.COM](http://KRONOTEX.COM)

8 mm


20



A **natural look** is achieved by the authentic material structure, which can be seen and felt.



A special deep embossing conveys the impression of laid single tiles and gives a feeling of **real tiled flooring**.

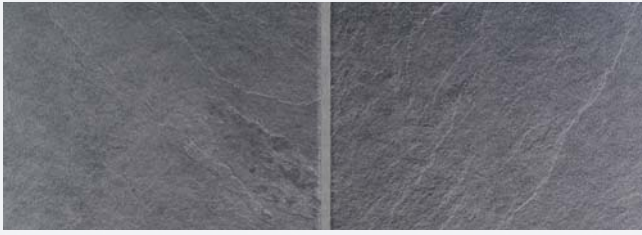

**STONEHENGE** / TILE / TI

D 975




**TRAVERTIN** / NATURAL STONE FORMAT / ST

D 2819



**VENECIA** / TILE / TI

D 1277

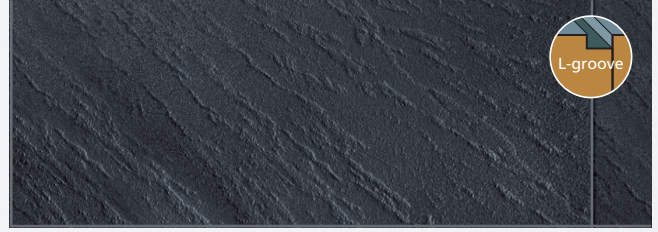

**STRATOS ANTHRACITE** / NATURAL STONE FORMAT / TI

\*D 2828



**SARGASSO SLATE** / TILE / ER

D 2815



**KAMALA** / NATURAL STONE FORMAT / ST

\*D 2963



**KIMBERLEY** / TILE / ER

D 2825



**ALTAMIRA** / NATURAL STONE FORMAT / ST

\*D 2964



**CANBERRA** / TILE / ER

D 2826




**VERACRUZ** / NATURAL STONE FORMAT / ST

\*D 2965



**ALCAMO** / TILE / ST

D 2992

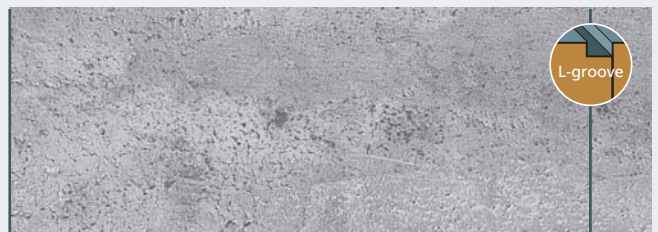

**CONCRETE** / NATURAL STONE FORMAT / ST

\*D 2966

**PANEL SIZE**  
1302 x 326 x 8 mm  
\*644 x 310 x 8 mm

**PACKING UNIT**  
5 panels / 2,122 m<sup>2</sup>  
\*10 panels / 1,996 m<sup>2</sup>

**PALLET**  
45 boxes / 95,502 m<sup>2</sup>  
\*48 boxes / 95,827 m<sup>2</sup>

**USE CLASS**  
32 / AC 4  
\*32 / AC 4

8+1mm

22

D 2774 - NATURAL PINE / 1-STRIP / V4

# EXQUISIT

## LIFE CAN BE SO CHIC

KRONOTEX.COM



**EXQUISIT** floors have an impressive floorboard look ...



**V4** – these panels feature a 45° sloped edge all the way round. When they are joined together, a v-groove forms, producing a **natural solid wood character**.

**8+1mm**



**V2** – these panels feature a 45° sloped edge on the long side.



**EXQUISIT** floors come with Kronotex **SOUND DESIGN** insulation for reduction of footfall and ambient noise.





**CHOCO LATTE** / 1-STRIP / MO / V4

D2236



**VERANDA** / 1-STRIP / WG / V2

D 2940



**RAINIER OAK** / 1-STRIP / ER / V4

D2242




**WHITWASHED OAK** / 1-STRIP / PR / V2

D 2987



**MAGONA** / 1-STRIP / ER / V4

D2770

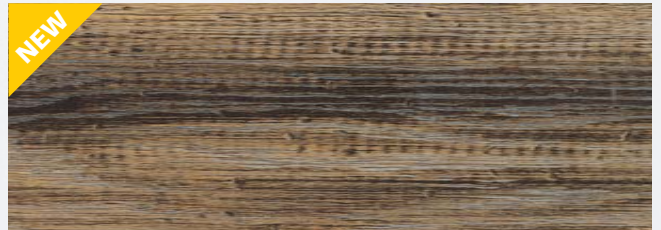

**CALICO OAK** / 1-STRIP / WG / V2

D 2988



**STABLE OAK** / 1-STRIP / ER / V4

D2773



**POLAR ASH** / 1-STRIP / MO / V2

D 2989



**NATURAL PINE** / 1-STRIP / MX / V4

D2774

# EXQUISIT

**PANEL SIZE**  
1380 x 193 x 8+1mm

**PACKING UNIT**  
8 panels / 2,131m<sup>2</sup>

**PALLET**  
56 boxes / 119,32m<sup>2</sup>

**USE CLASS**  
32 / AC 4






8 mm

26

# DYNAMIC

LIFE CAN BE SO VARIED



If requested, DYNAMIC floors will be provided with Kronotex **SOUND DESIGN** insulation for reduction of footfall and ambient noise.

D 2441 MAKASSAR / 1-STRIP



**HERITAGE PEKAN** / 1-STRIP / WG

D 406



**CHESTNUT** / 3-STRIP / PR

D 764



**CARELIA MAPLE** / 2-STRIP / WG

D 437



**WHITE BEECH** / 1-STRIP / PR

D 856



**ANTIQUÉ OAK** / 2-STRIP / WG

D 643



**ATLAS CHERRY** / 1-STRIP / PR

D 1372




**NATURAL OAK** / 2-STRIP / WG

D 644



**CONSTANCE BEECH** / 3-STRIP / PR

D 1404

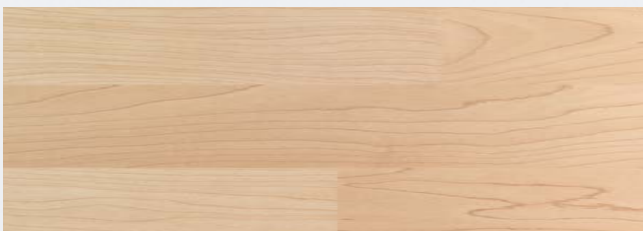

**MUERITZ MAPLE** / 3-STRIP / PR

D 654




**COGNAC OAK** / 3-STRIP / PR

D 1412



**NOCE COUNTRY** / 3-STRIP / PR

D 725

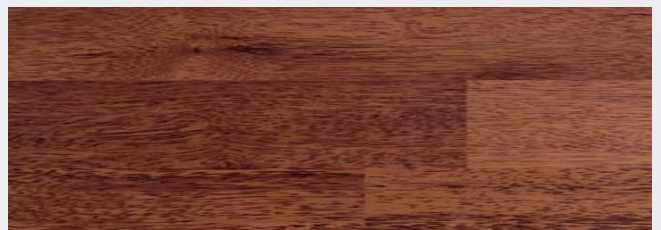

**MERBAU BRAZIL** / 3-STRIP / PR

D 1460



**SACRAMENTO PINE** / 1-STRIP / WG

D 1496



**VINTAGE OAK** / 2-STRIP / WG

D 2781



**OAK ACHAT** / 3-STRIP / MO

D 2304



**PLUM ASTORIA** / MULTI-STRIP / MO

D 2791



**BEECH CHATEAU** / 1-STRIP / WG

D 2404



**ROUTE DES VINS FONCÉ** / 1-STRIP / WG / V4

D 2905



**OAK CHATEAU** / 1-STRIP / WG


D 2427



**HACIENDA OAK** / 1-STRIP / PR

D 2928

28

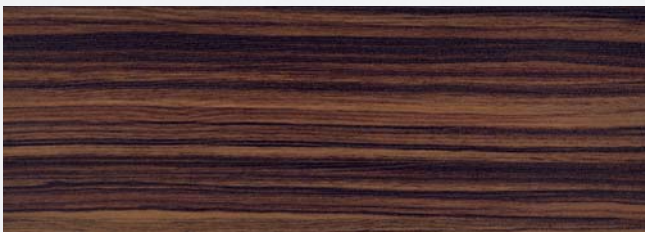

**MAKASSAR** / 1-STRIP / WG

D 2441



**BOURBON OAK** / 1-STRIP / PR

D 2929



**WALNUT** / 2-STRIP / WG

D 2457



**WENGE GABUN** / 3-STRIP / WG

D 2930



**CYPRESS** / 2-STRIP / WG

D 2777



**PLUM** / 2-STRIP / MO

D 2931



**VERANDA** / 1-STRIP / WG

D 2940



**HACIENDA OAK GREY** / 1-STRIP / PR

D 2958



**SINA CHERRY** / 2-STRIP / PR

D 2941



**FINE OAK** / MULTI-STRIP / PR

D 2961



**NORDIC ASH** / 2-STRIP / WG

D 2943



**BLACK OAK** / 1-STRIP / PR

D 2980



**ROUTE DES VINS CLAIR** / 1-STRIP / WG / V4

D 2949




**RUSTIC WOOD** / 2-STRIP / MO

D 2984



**SPOTTED GUM** / 1-STRIP / WG

D 2954

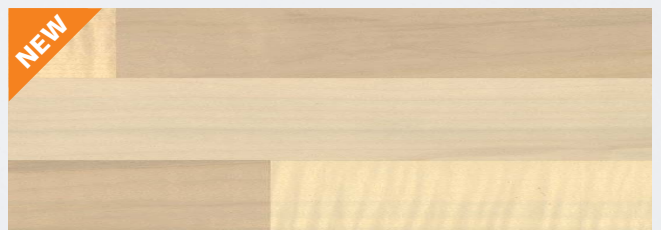

**KODIAC MAPLE** / 3-STRIP / PR

D 2985



**HACIENDA OAK BEIGE** / 1-STRIP / PR

D 2957



**BORNEO TEAK** / 1-STRIP / PR

D 2986

# DYNAMIC

**PANEL SIZE**  
1380 x 193 x 8 mm

**PACKING UNIT**  
8 panels / 2,131m<sup>2</sup>

**PALLET**  
56 boxes / 119,32 m<sup>2</sup>

**USE CLASS**  
32 / AC 4





**7** mm

30

# SMART

LIFE CAN BE SO MUCH FUN



D2780 PORTLAND OAK / 3-STRIP



**RUPPIN OAK** / 2-STRIP / PR

D 1210



**TRENTINO APPLE** / 2-STRIP / PR

D 2458



**MERBAU** / 3-STRIP / PR

D 1329



**PORTLAND OAK** / 3-STRIP / PR

D 2780



**WILD CHERRY** / 3-STRIP / PR

D 1359



**STONE OAK** / 1-STRIP / PR

D 2946



**MOUNTAIN MAPLE** / 3-STRIP / PR

D 1371



**OAK WHITE** / 1-STRIP / PR

D 2951



**COUNTRY OAK** / 3-STRIP / PR

D 1411




**SCOTLAND OAK** / 3-STRIP / PR

D 2982



**BEECH NOBELLE** / 3-STRIP / PR

D 1424

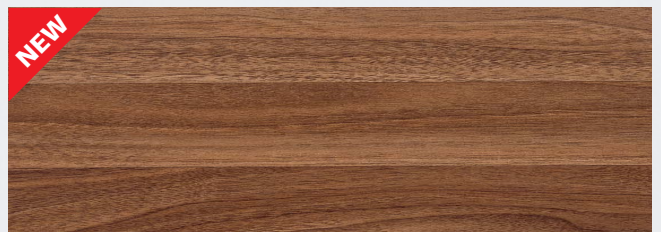

**ELEGANT WALNUT** / 3-STRIP / PR

D 2983



**6** mm

32

# BASIC

LIFE CAN BE SO COOL

[KRONOTEX.COM](http://KRONOTEX.COM)

D742 SUTTER OAK / 1-STRIP





**SUTTER OAK** / 1-STRIP / PR

D 742



**CANMORE OAK** / 3-STRIP / PR

D 1418



**MERBAU** / 3-STRIP / PR

D 1329



**TICINO WALNUT** / 3-STRIP / PR

D 1440



**WILD CHERRY** / 3-STRIP / PR

D 1359



**NATURAL MAPLE** / 3-STRIP / PR

D 1465



**RHÔNE BEECH** / 3-STRIP / PR

D 1403

# ACCESSORIES



34

LIFE CAN BE SO PERFECT

[KRONOTEX.COM](http://KRONOTEX.COM)



**Kronotherm sound 5 mm**  
**Footfall sound insulation board**  
 1 piece = 800 x 675 mm  
 20 pieces = 10,80 m<sup>2</sup>



**Ktex underlay mat / foil**



**Ktex fixing system**  
 for Ktex skirtings 1, 4 and 6



**Ktex rosettes for radiator**



**Ktex laminate cleaner**




**Ktex repair paste**  
 different colours

**Kronotex** offers a comprehensive range of accessories for all floors. From footfall sound insulation and installation systems right through to repair paste and the correct bars and profiles, **Kronotex** can offer you everything that you need for endless fun and satisfaction with your **Kronotex** floor.


**Brochure Accessories**




# SKIRTINGS / CORNERS

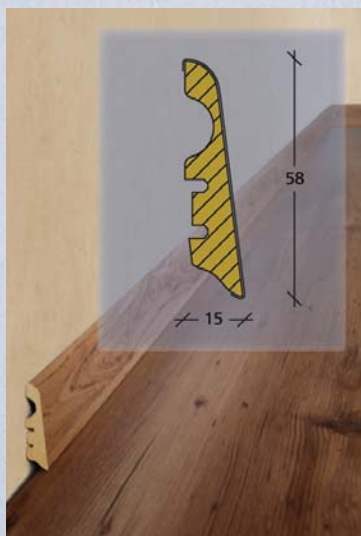

**Ktex 1**  
15 x 58 x 2400 mm

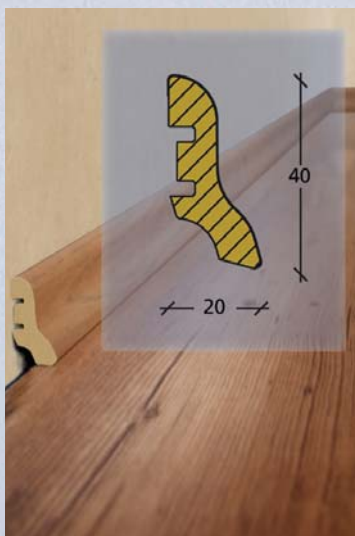

**Ktex 4**  
20 x 40 x 2400 mm

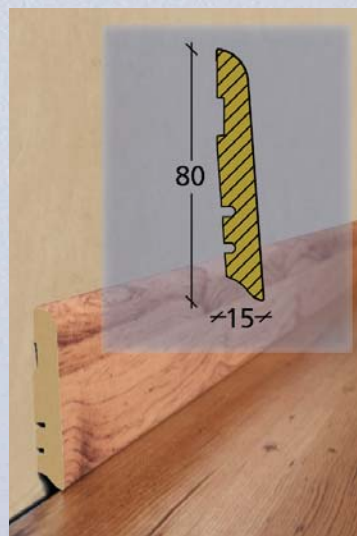

**Ktex 6**  
15 x 80 x 2400 mm

Other skirtings are available on request.



**Ktex 4 outer corners**



**Ktex 4 inner corners**




**Ktex 1 end pieces**

Outer corners, inner corners and end pieces are available for profiles Ktex 1 and Ktex 4.


# ALUMINIUM PROFILES



**Ktex motion profile**  
7-13 mm, Length: 2700 mm / 900 mm

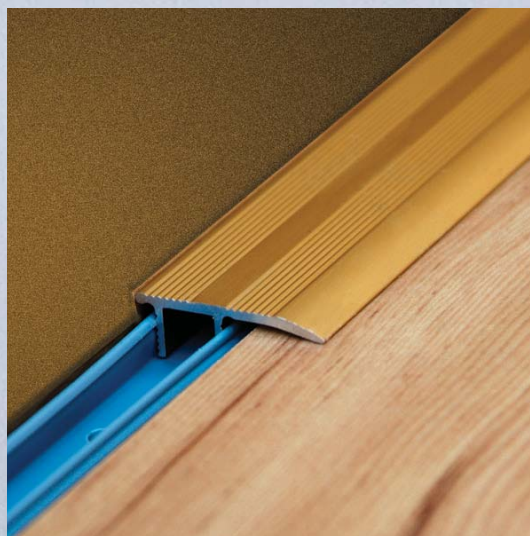

**Ktex end profile**  
7-13 mm, Length: 2700 mm / 900 mm

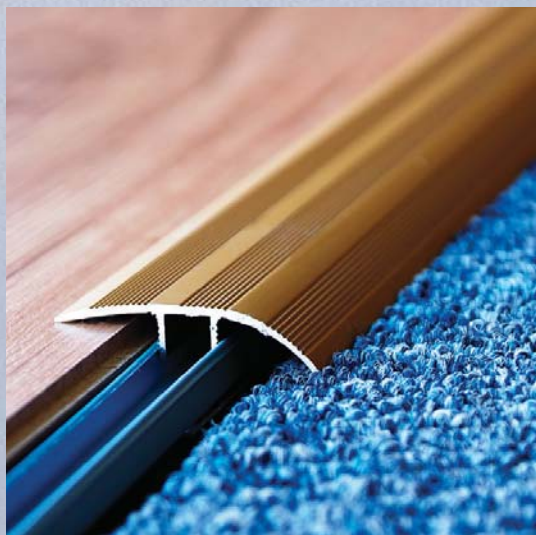

**Ktex transition profile**  
7-13 mm, Length: 2700 mm / 900 mm



**Ktex stair profile**  
7-9 mm, Length: 2700 mm / 1350 mm

# PRESENTATION

38




**Twice**



**Decoflag**  
40 x 200 cm



**Decoflag**  
80 x 200 cm

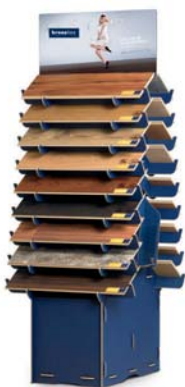

**Tower 18**



**Tower 12**



**Ultimate 28**



**Display**

MAMMUT  
AMAZONE  
ROBUSTO  
MEGA  
EXQUISIT



Twin module MDF




Triple module MDF



Little Combo

# TECHNICAL INFORMATION

**Kronotex** laminates consist of at least four stable layers which ensure the extraordinary durability and unique quality of **Kronotex** floors.

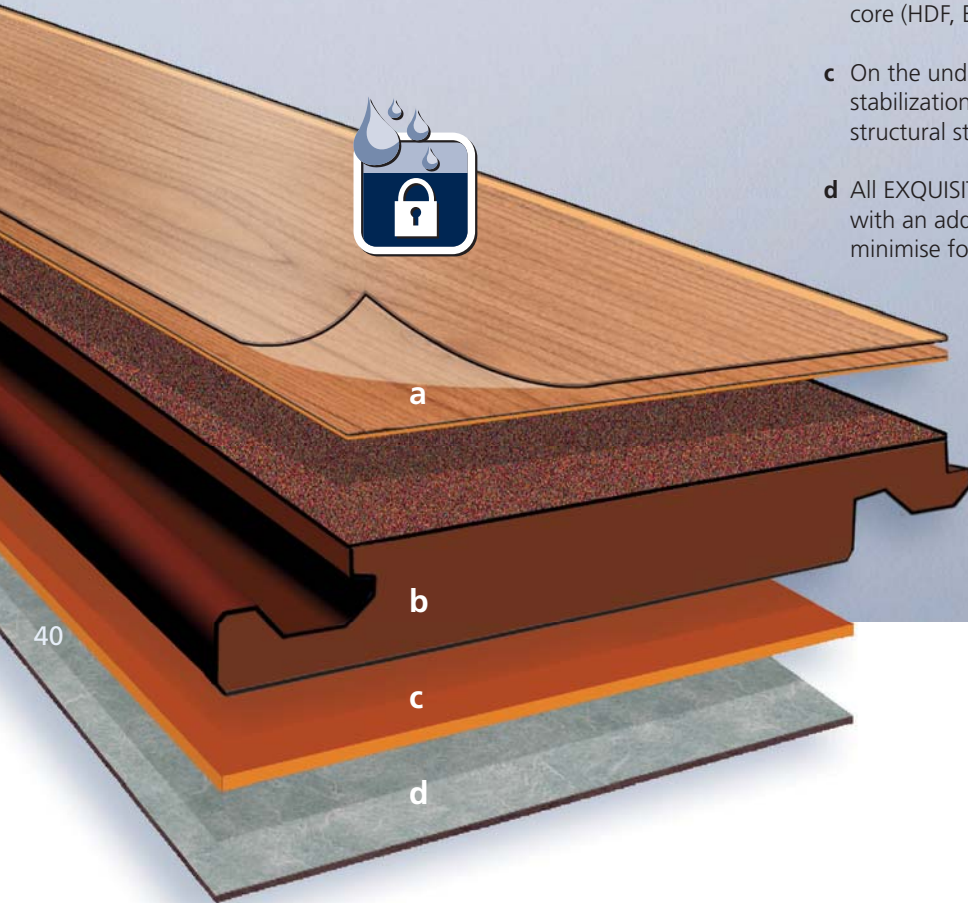

- a** The top surface of the flooring consists of a specially resistant protective overlay film. This is fused with an attractive resinated decorative film into a practically abrasion-proof, hardwearing surface.
- b** Extremely dense HDF fiberboard forms the supportive core (HDF, E1).
- c** On the undersurface of the core a dampnessimpeding stabilization film ensures and preserves the high structural stability of **Kronotex** laminates.
- d** All EXQUISIT and selected DYNAMIC floorings are fitted with an additional "SOUND DESIGN" underlay to minimise footstep and ambient noise.

## WHAT COUNTS IS THE RIGHT BASE

Once you have decided for a laminate floor, when quality and appearance are a perfect fit, then you need to check the requirements for perfect installation. The suitability of the subfloor is very important.

### SUITABLE

- Kronoply OSB
- old flooring such as wood, firmly-adhering PVC, dry ceramic, linoleum
- cement screed (max. residual moisture: 2.0 CM%)
- anhydrite cement and anhydrite flow cement screed (max. residual moisture: 0.3 CM%)
- magnesia screed (max. residual moisture: 3.0 CM%)

Have a screed specialist in your area give you a residual moisture report!

Wet and damp rooms, saunas, carpeting and xylolith are not suitable subfloors

The subfloor must be dry, level, firmly affixed and clean. Minor unevenness can be compensated with an underlay mat or – if exceeding 3 mm/m – sanded down or leveled with a filler.



# FLOOR HEATING – NO PROBLEM

**Kronotex** laminate floors can be readily installed upon underfloor heating, serve well and even help to save on heating costs. Simply observe these conditions carefully:



Be sure to heat mineral underlays before flooring installation to eliminate any excess dampness.

Have a heating specialist in your area give you a heating report.

Ensure that during installation, the surface temperature of the floor is at least 15°C (60°F).

For dampness insulation and as a vapor barrier, use a PE film (0.2mm) underlayment. For sound absorption you can use PE foam, **Kronotex** underlay mat or **Kronotex** Laminate flooring with "SOUND DESIGN".

At the beginning of each heating period, when you first turn on the underfloor heating, raise the temperature gradually in 5°C (9°F) increments per day until you reach the desired temperature. The floor's surface temperature should not exceed 26°C (80°F).



## CLEANING AND CARE

**Kronotex** flooring is not only hygienic but also very easy to look after. Here is some advice:

Sweep the dry floor with a soft broom or use a vacuum cleaner.

Marks and dirt can be wiped off with a slightly damp cloth, following the grain of the plank. For stubborn marks, please use **Kronotex** cleaner.

Please use felt pads under furniture and soft rubber castors on chairs.

Place door mats in special areas (hall, entrance). In industrial buildings, provide footwells.

Minor damage to the floor can easily be repaired with the **Kronotex** repair kit. In case of more serious damage, please consult a specialist.

Detailed instructions for installing **Kronotex** floors are available free on DVD and of course at our homepage:

**KRONOTEX.COM**

# QUALITY ON PRINCIPLE

Not only do **Kronotex** floors meet the prescribed norms, they consistently exceed them! This is possible because **Kronotex** adopts a fully-integrated approach to production (from the tree through to the finished panel), and has numerous control and measuring devices at its disposal.

For this reason, **Kronotex** can offer guarantees which go far and beyond warranties under law. You will be hard pressed to find any other producer who can do likewise.



Kronotex GmbH & Co. KG (in the following: **Kronotex**) provides buyers in addition to the unencumbered guarantee under law, an additional guarantee covering the abrasion resistance of the floor's surface. It extends from the date of purchase and covers the products as follows:

## CONDITIONS OF GUARANTEE

**Kronotex** laminate panels must be checked before and during installation for any defects. No liability is accepted for laminate flooring installed despite visible defects.

**Kronotex** laminate floors must be installed properly according to the instructions, in a dry room, and in accordance with the respective use class. No liability is accepted for **Kronotex** laminate floors installed in damp rooms.

Abrasion areas on **Kronotex** laminate floors must be clearly visible and at least 1cm<sup>2</sup> in size. And in particular the design layer must be completely abraded. No liability is accepted for abrasion on the edges of the elements or for unusual or improper use, and in particular for damage caused by mechanical stress.

Validity of guarantee is dependent on regular cleaning and maintenance of **Kronotex** floors as described in the care instructions.

Claims under guarantee are valid only if submitted within 30 days of ascertaining damage and accompanied by the original receipt from the retailer. In investigating a guarantee claim, **Kronotex** retains the right to examine the floor in question on site.

## OUR GUARANTEE

In cases falling under guarantee, **Kronotex** will deliver a replacement for the damaged element. If the flooring in question is no longer available, then the buyer can choose a replacement of equal value from the current **Kronotex** product line.

Since an annual 10% depreciation in the value of **Kronotex** laminates can be assumed, delivery of a compensation product is dependent on payment of the appropriate difference by the buyer.

No liability is accepted for further damages, especially consequential damages such as those incurred during installation or removal, or transport costs for damaged **Kronotex** laminate floors.

# QUALITY CONTROL

The complex profile geometries are recorded, compared and evaluated using the latest in coordinate technology.

TEST	TEST METHOD	CHARACTERISTICS
Formaldehyde emission	EN 717-1	< 0,05 ppm
Surface stain resistance	EN 438-2, 15	Grade 5, no visible changes to surface
Lightfastness	EN ISO 105-B02 EN 20 105-A02	≥ Level 6 Blue Wool Scale ≥ Level 4 Grey Scale
Resistance to cigarette embers	EN 438-2, 18	Grade 4, no visible changes to surface
Fire resistance	EN 13501-1	Ignites with difficulty, at least C <sub>fl</sub> -s1
Height difference between connected elements	EN 13329	Average: ≤ 0,10 mm max: ≤ 0,15 mm
Edge straightness (bend)	EN 13329	≤ 0,3 mm/m
Openings between connected elements	EN 13329	Average: ≤ 0,15 mm max: ≤ 0,20 mm
Static indentation	EN 433	< 0,01 mm – no visible changes Impression in test with straight steel cylinder of 11,3 mm diameter



As a worldwide leader in the manufacturing of laminate flooring, **Kronotex** offers not only innovative products of top quality, but also assists with extensive logistics, its distribution network and a knowledgeable customer service.

We will be pleased to answer your questions concerning our **Kronotex** laminate flooring. Just ask for our free information material!

**KRONOTEX GMBH & CO. KG**

Wittstocker Chaussee 1  
D-16909 Heiligengrabe  
Germany  
Tel. +49 (0) 33962-69 150  
Fax +49 (0) 33962-69 288  
sales.floor@kronotex.de  
www.kronotex.com

**KRONOTEX USA, LLC**

810 Technology Drive  
Barnwell, SC 29812  
U.S.A.  
Tel. +1-803-224-9150  
Fax +1-803-541-3299  
sales@kronotexusa.com  
www.kronotexusa.com



Institut Bauen  
und Umwelt e.V.  
*Institute Construction  
and Environment e.V.*